


6-AXIS FORCE TORQUE SENSORS

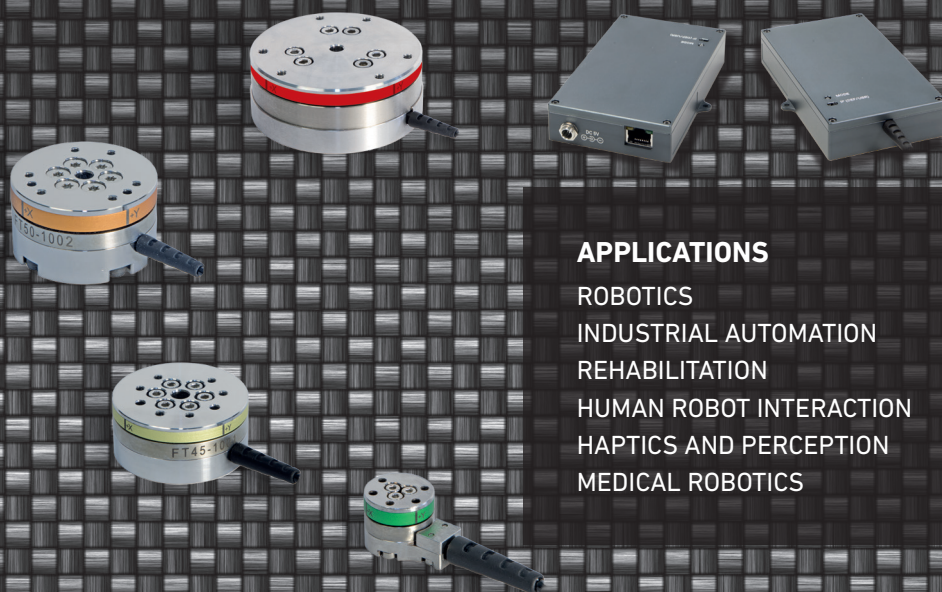

APPLICATIONS

ROBOTICS
INDUSTRIAL AUTOMATION
REHABILITATION
HUMAN ROBOT INTERACTION
HAPTICS AND PERCEPTION
MEDICAL ROBOTICS

MAIN FEATURES

- + Six axis load measurement (forces and torques)
- + High grade stainless steel construction for high stiffness
- + Titanium alloy sensors available when higher resolution may be required
- + High overload capacity, up to 3 times rated load
- + Semiconductor strain gages for small size, high stiffness and low noise sensors
- + Compact data acquisition electronics with Ethernet connectivity (EtherCAT on request)
- + Embedded webserver for easy system configuration from any browser

CONTACTS

ioannis.sarakoglou@iit.it
nikos.tsagarakis@iit.it
www.iit.it | treerobotics.eu

Humanoids and Human Centered Mechatronics
Istituto Italiano di Tecnologia,
Via Morego 30, 16163 Genoa, Italy

BRINGING COLOUR TO THE WORLD OF SENSORS!

CHOOSE THE COLOUR CODED
SENSOR WHICH BEST FITS YOUR
APPLICATION'S LOAD



		FT-17	FT-45	FT-50	FT-88
Dimensions (D × H) mm		17 × 14.5	45 × 20.8	50 × 28	88 × 34.5
Load Range	Fz	± 70N	± 1000N	± 2,000N	± 3500N
	Fx, Fy	± 50N	± 500N	± 1,000N	± 2500N
	Mx, My, Mz	± 0.5Nm	± 20Nm	± 40Nm	± 200Nm
Resolution	Fx, Fy, Fz	10mN	250mN	500mN	900mN
	Mx, My, Mz	70 µNm	5mNm	10mNm	50mNm
Electronics type		DataBox	DataBox / fully Embedded		
Connectivity		Ethernet/EtherCAT(on request)			
System Configuration		Webserver/Library			
Development Kit		SDK (VS Win., Linux, ROS)			
Data Rate		1kHz (higher on request)			

CONTACTS

ioannis.sarakoglou@iit.it
nikos.tsagarakis@iit.it
www.iit.it | treerobotics.eu

Humanoids and Human Centered Mechatronics
Istituto Italiano di Tecnologia,
Via Morego 30, 16163 Genoa, Italy